


Wellness Shower[®]

Performance Data Sheet

This system has been tested according to NSF/ANSI 177 for reduction of free available chlorine. The concentration of free available chlorine in water entering the system was reduced to a concentration less than or equal to the permissible limit for water leaving the system, as specified in NSF/ANSI 177. This system has not been evaluated for free available chlorine reduction performance in the presence of chloramines. Free available chlorine reduction performance may be impacted by the presence of chloramines in the water supply. Please contact your local water utility to determine if chloramines are used in treating your water.

Wellness Shower NSF Test Results

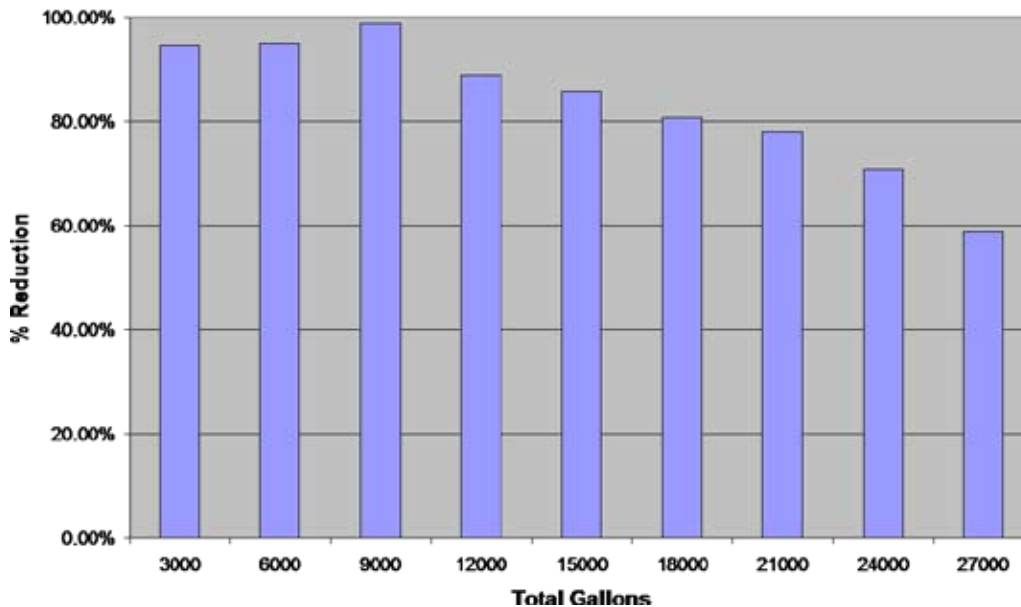

Sample Point (gallons)	Influent Chlorine (mg/l)	Effluent Chlorine (mg/l) and % Reduction				
		Unit 1	Unit 1 %	Unit 2	Unit 2 %	Average %
0 (Initial)	2	0.6	70.00%	0.46	77.00%	73.50%
3000	2.2	0.13	94.09%	0.11	95.00%	94.55%
6000	2	0.13	93.50%	0.07	96.50%	95.00%
9000	2.1	ND	100.00%	0.05	97.62%	98.81%
12000	2.1	0.19	90.95%	0.28	86.67%	88.81%
15000	2.1	0.23	89.05%	0.37	82.38%	85.72%
18000	1.9	0.36	81.05%	0.37	80.53%	80.79%
21000	2.2	0.39	82.27%	0.58	73.64%	77.96%
24000	1.9	0.62	67.37%	0.49	74.21%	70.79%
27000	1.9	0.65	65.79%	0.92	51.58%	58.69%



Wellness Enterprises, LLC
 418 SW 140th Terrace
 Newberry, FL 32669

Toll-Free: 800-428-9419
 Tel: 352-333-0480
 Fax: 352-333-0490

Wellness Shower Performance Data Sheet

NOTES:

1. While testing was performed under standard lab conditions, actual performance may vary.
2. Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection.
3. Filter life will vary in proportion to the amount of water used and the level of impurities in the water being processed. For optimum performance, it is essential that the filter be replaced on a regularly scheduled basis as follows: (a) every 18 - 24 months; (b) every 27,000 gallons; (c) when the flow rate diminishes.
4. The Wellness Shower is warranted as follows: All parts, workmanship and materials - 1 year. Please see the Owner's Manual for complete product guarantee and warranty information.
5. Please see the Owner's Manual for installation instructions and operating procedures.



Wellness Shower Technical Specifications	
Filtration Media Enhancement Media	KDF 55/85, 50 Micron Polyethylene Pre-filter Bakuhau®, Taicho®, Tenko-Seki®, Magnetite, & High Gauss Magnets
Maximum Flow Rate	2.5 gpm (9.5 lpm)
Pressure Range	20 - 100 psi (1.38 - 6.89 bar)
Rated life	27,000 gallons (102,206 liters) or 18 - 24 Months
Operating Temperatures	40° - 120° Fahrenheit (4.4° - 48.8 C)
Body dimensions	9.2" x 3.75" (23.4 x 9.5 cm)
Body weight (dry)	2 lb 9 oz. (1.2 kg)
Product Warranty	One year for workmanship & material defects



System Tested and Certified by NSF
International against NSF/ANSI Standard 177
for the reduction of free available chlorine.



Wellness Enterprises, LLC
418 SW 140th Terrace
Newberry, FL 32669

Toll-Free: 800-428-9419
Tel: 352-333-0480
Fax: 352-333-0490